




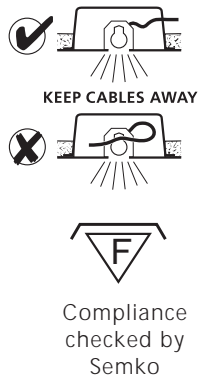


INSULATION BOX (300X300X150)

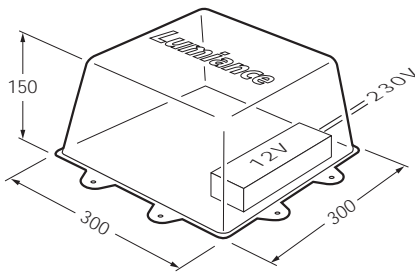

QR-CB51 GU5.3/GX5.3 12 V cool beam

| | | |
|----------------------------------|--------|---|
| Instar trend 62 flush | 35 W | → |
| Instar trend 75 swing | 35 W | → |
| Instar trend 75 cone/comfort | 20 W | → |
| 1 x Motto 82 | 35 W | → |
| 2 x Motto 82 | 35 W * | → |
| 1 x Motto 82 with cone accessory | 35 W | → |
| 2 x Motto 82 with cone accessory | 20 W * | → |
| Instar Pro 80 swing | 35 W * | → |
| Instar Pro 80 comfort | 20 W * | → |
| Instar Pro 95 cone | 20 W * | → |

QR-CB35 GU4/GZ4 12 V cool beam

| | | |
|-----------------------|--------|---|
| Instar Pro 65 swing | 20 W * | → |
| Instar Pro 65 comfort | 20 W * | → |
| Instar Pro 80 cone | 20 W * | → |

QT12 GY6.35 12 V capsule







| | | |
|----------------------|--------|---|
| Instar Pro 95 swing | 35 W * | → |
| Instar Pro 115 swing | 35 W * | → |

* SEMKO verification pending

NOTE:
Other fixtures can also be used in this box,
provided that the minimum recess dimensions
and maximum Wattages specified for those fixtures
in insulated ceilings are respected.

For mains Voltage Lamps: please turn over

INSULATION BOX (300X300X150)

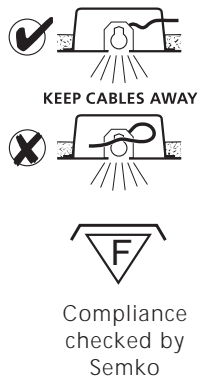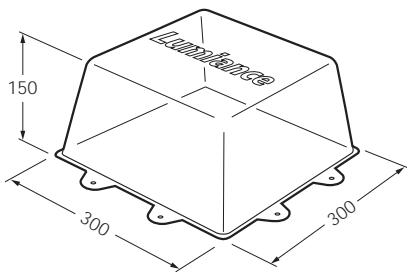

QPAR51 GU10 mains Voltage

| | | |
|----------------------------------|--------|---|
| Inset trend 62 flush | 35 W | → |
| Inset trend 75 swing | 50 W | → |
| Inset trend 75 cone/comfort | 35 W | → |
| 1 x Motto 82 | 50 W | → |
| 2 x Motto 82 | 35 W * | → |
| 1 x Motto 82 with cone accessory | 50 W | → |
| 2 x Motto 82 with cone accessory | 35 W * | → |
| Inset Pro 80 swing | 50 W * | → |
| Inset Pro 80 comfort | 50 W * | → |
| Inset Pro 95 cone | 50 W * | → |

QPAR64 GU10 mains Voltage

| | | |
|--------------------|--------|---|
| Inset Pro 95 swing | 50 W * | → |
|--------------------|--------|---|

* SEMKO verification pending

NOTE:
Other fixtures can also be used in this box,
provided that the minimum recess dimensions
and maximum Wattages specified for those fixtures
in insulated ceilings are respected.

For 12V Lamps: please turn over